


Standalone DVR

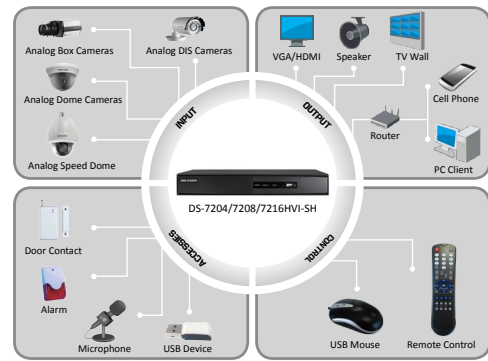

Key features

- H.264 video compression
- CIF resolution real-time recording
- HDMI and VGA output at up to 1920×1080P resolution
- Dual-stream
- Up to 4/8/16-ch synchronous playback
- NTP, SMTP, NFS, UPnP and iSCSI protocols

Rear Panel



1. Video in
2. Video out
3. USB interface
4. HDMI interface
5. VGA interface
6. Audio in, RCA connector
7. Audio out, RCA connector
8. LAN network interface
9. RS-485 serial interface
10. 12VDC power input
11. Power switch
12. GND

Specifications

	HDS-7204HVI-HDMI	HDS-7208HVI-HDMI	HDS-7216HVI-HDMI
Video / Audio input			
Video compression	H.264		
Video input	4-ch	8-ch	16-ch
Video input interface	BNC (1.0 Vp-p, 75 Ω), PAL / NTSC self-adaptive		
Audio compression	G.711u		
Audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ)		
Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ) (using the audio input)		
Video / Audio output			
HDMI / VGA output	1-ch, resolution: 1920 × 1080P / 60 Hz, 1600 × 1200 / 60 Hz, 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz		
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480		
Encoding resolution	4CIF / 2CIF / CIF / QCIF		
Frame rate	Mode1: 4CIF / 2CIF @ 12 fps or CIF / QCIF @ 25 fps (P) / 30 fps (N) Mode2: Channel 1: 4CIF / 2CIF / CIF / QCIF @ 25 fps (P) / 30 fps (N), Channel 2-4: CIF / QCIF @ 25 fps (P) / 30 fps (N)	Mode1: 4CIF / 2CIF @ 8 fps or CIF / QCIF @ 25 fps (P) / 30 fps (N) Mode2: Channel 1: 4CIF / 2CIF / CIF / QCIF @ 25 fps (P) / 30 fps (N), Channel 2-8: CIF / QCIF @ 25 fps (P) / 30 fps (N)	Mode1: 4CIF / 2CIF @ 6fps or CIF / QCIF @ 25 fps (P) / 30 fps (N) Mode2: Channel 1: 4CIF / 2CIF / CIF / QCIF @ 25 fps (P) / 30 fps (N), Channel 2-16: CIF / QCIF @ 25 fps (P) / 30 fps (N)
Video bit rate	32 Kbps ~ 2048 Kbps, or user defined (Max. 3072 Kbps)		
Audio output	1-ch, RCA (Linear, 1 kΩ)		
Audio bit rate	64 Kbps		
Dual-stream	Support; Sub-stream: CIF @ 6 fps, QCIF @ 25 fps (P) / 30 fps (N)		
Stream type	Video, Video & Audio		
Synchronous playback	4-ch	8-ch	16-ch
Hard disk			
SATA	1 SATA interface		
Capacity	Up to 4TB capacity		
External interface			
Network interface	1, RJ45 10M / 100M Ethernet interface		
Serial interface	1 RS-485 interface, half-duplex		
USB interface	2, USB2.0		
General			
Power supply	12 VDC		
Consumption	≤ 10 W	≤ 10 W	≤ 15 W
Working temperature	-10 °C ~ +55 °C		
Working humidity	10% ~ 90%		
Chassis	Standalone 1U chassis		
Dimensions (W × D × H)	315 × 230 × 45 mm		
Weight	≤ 2 kg (without hard disk or DVD-R/W)	≤ 4 kg (without hard disk or DVD-R/W)	≤ 4 kg (without hard disk or DVD-R/W)