

HDS-7224/7232HVI-HDMI

Introduction:

HDS-7224/7232HVI-HDMI series DVR (Digital Video Recorder) is a new generation recorder developed by HDPARAGON independently which can connect analog cameras and provide powerful surveillance. Combined with multiple advanced technologies, such as audio and video encoding & decoding technology, embedded system technology, storage technology and network technology. It can both work alone as a recorder and cooperate with other devices to build a comprehensive surveillance system.

Available Models:

HDS-7224HVI-HDMI, HDS-7232HVI-HDMI

Main Features:

- Main stream supports up to WD1 resolution for and sub stream supports CIF/QCIF resolution.
- Simultaneous HDMI/VGA and CVBS outputs.
- HDMI/VGA output at up to 1920×1080P resolution.
- Channel-zero encoding.
- Support dual stream.
- HDD quota management; different capacity can be assigned to different channel.
- Holiday recording schedule configuration.
- Smart searching for the event triggered record files.
- Digital zoom of video in live view or playback mode.
- Up to 16-ch synchronous playback.
- 1 self-adaptive 10M/100M /1000M network interface.
- IPv6 is supported.
- Network detection function.
- NTP, SMTP, NFS, UPnP™ and iSCSI protocols supported.



Physical Interfaces:


HDS-7232HVI-HDMI



Note: The rear panel of HDS-7224HVI-HDMI provides 24 video input interfaces.

- ① VIDEO IN
 - ② VIDEO OUT
 - ③ USB Interface
 - ④ HDMI Interface
 - ⑤ VGA Interface
 - ⑥ ALARM IN/OUT
 - ⑦ AUDIO IN, RCA Connector
 - ⑧ AUDIO OUT, RCA Connector
 - ⑨ LAN Network Interface
 - ⑩ RS-485 Serial Interface
- 12VDC Power Input
Power Switch
GND

Typical Application:

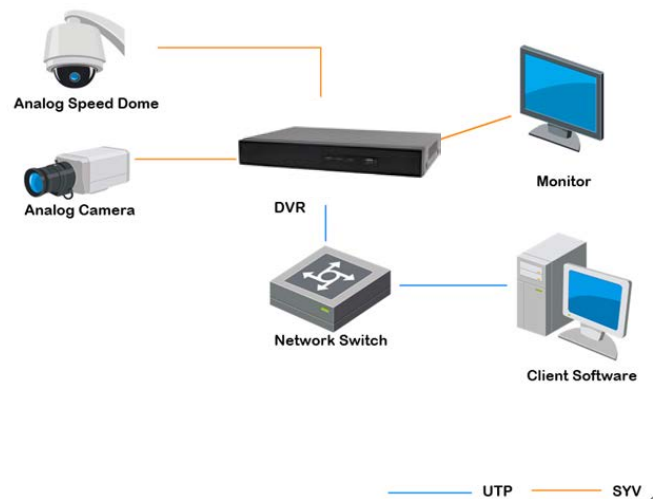

Specifications

Model		HDS-7224HVI-HDMI	HDS-7232HVI-HDMI
Video/Audio input	Video compression	H.264	
	Video input	24-ch	32-ch
	Video input interface	BNC (1.0 Vp-p, 75 Ω), PAL /NTSC self-adaptive	
	Audio compression	G.711u	
	Audio input	4-ch, RCA (2.0 Vp-p, 1 kΩ)	
	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 kΩ) (using the audio input)	
Video/Audio output	HDMI/VGA output	1-ch, resolution: 1920 × 1080P / 60 Hz , 1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz	
	CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
	Encoding resolution	WD1/ 4CIF / 2CIF / CIF / QCIF	
	Frame rate	WD1 / 4CIF @ 15 fps or 2CIF / CIF / QCIF @ 25 fps (P) / 30 fps (N)	
	Video bit rate	32 Kbps ~ 3072 Kbps, or user defined (Max. 3072 Kbps)	
	Audio output	1-ch, RCA (Linear, 1 kΩ)	
	Audio bit rate	64 Kbps	
	Dual-stream	Support; Sub-stream: CIF / QCIF	
	Stream type	Video, Video & Audio	
	Synchronous playback	16-ch	
Hard disk	SATA	2 SATA interface	
	Capacity	Up to 4TB capacity	
External interface	Network interface	1, RJ45 10M /100M /1000M Ethernet interface	
	Serial interface	1 RS-485 interface, half-duplex	
	USB interface	2, USB 2.0	
	Alarm in	4	
	Alarm out	1	
General	Power supply	12 VDC	
	Consumption (without hard disk or DVD-R/W)	≤ 25 W	
	Working temperature	-10 °C ~+55 °C	
	Working humidity	10% ~ 90%	
	Chassis	19-inch rack-mounted 1U chassis	
	Dimensions (W × D × H)	445 × 290 × 45 mm	
	Weight (without hard disk or DVD-R/W)	≤ 4 kg	