


# 720 TVL PICADIS Indoor IR Dome Camera



### Key features

- 1/3" PICADIS
- 1.3MP Sensor: 1280 (H) x 960 (V) Effective Pixels
- 720 TVL Horizontal Resolution
- True Day/Night
- 2.8/3.6/6mm Fixed Lens, 0.1 lux /F1.2
- 20m IR Distance
- Smart IR, high dynamic range
- Superior video image output and ultra low light illumination
- Wide operating temperature range

### Dimensions

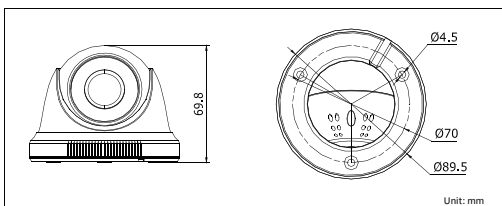

HDS-5785P-IR	
Camera	
Image Sensor	1/3" PICADIS
Signal System	PAL/NTSC
Effective Pixels	1280 (H) x 960 (V)
Min. Illumination	0.1 Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter speed	PAL: 1/25 s to 1/25,000 s NTSC: 1/30 s to 1/30,000 s
Lens	3.6mm (2.8mm, 6mm optional)
	Angle of view: 71.4° (3.6 mm)
Lens Mount	M12
Angle Adjustment	Pan: 0 - 360°;Tilt: 0 - 75°; Rotation: 0 - 360°
Day & Night	IR cut filter with auto switch
Horizontal Resolution	720 TVL
Synchronization	Internal synchronization
Video Output	1Vp-p composite output (75 Ω/BNC)
S/N Ratio	More than 62 dB
General	
Working Temperature/Humidity	-40 °C - 60 °C (-40 °F - 140 °F) Humidity 90% or less (non-condensing)
Power Supply	12 V DC
Power Consumption	Max. 1.5 W (Max. 4.5 W with IR cut filter on)
IR Range	20 meters
Dimensions	Φ89.5 x 69.8 mm(Φ3.52" x2.75")
Weight	200 g (0.44 lbs)

### Accessories



(Wall Mount)



(Wall Mount)