


HƯỚNG DẪN KẾT NỐI WIFI CHO CAMERA IP

&


* Đăng nhập vào địa chỉ ip camera (kết nối dây mạng), Sử dụng phần mềm SADPTool để dò tìm ip.

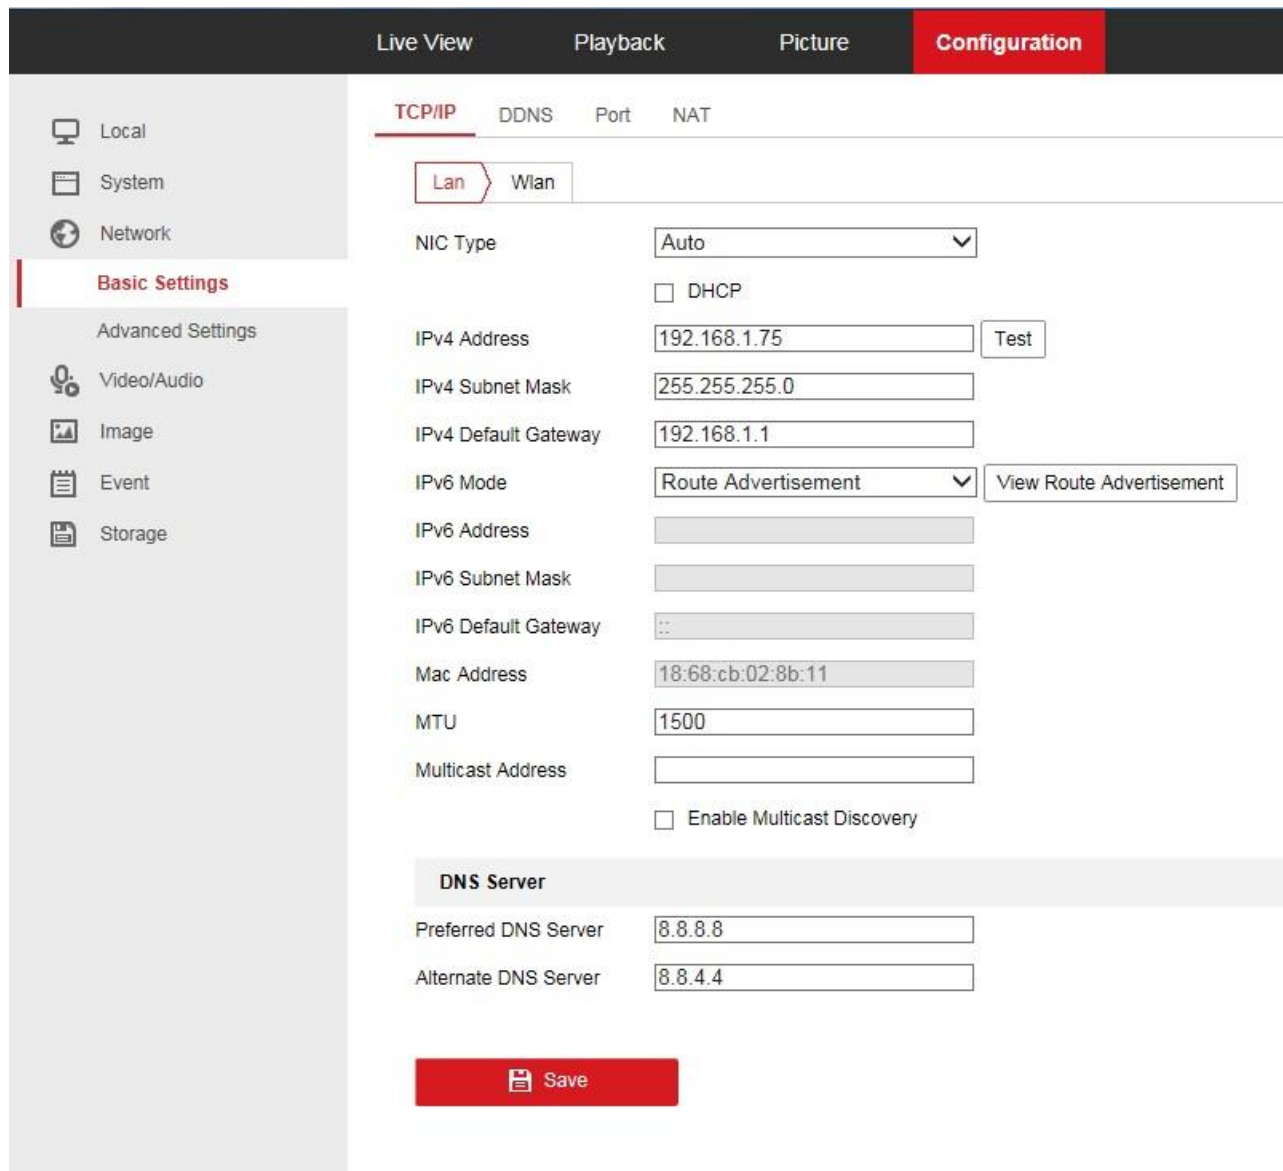

The screenshot shows the 'Configuration' tab of a camera's web interface. The 'TCP/IP' sub-tab is active, with 'Lan' selected. The 'NIC Type' is set to 'Auto'. The 'IPv4 Address' is 192.168.1.75, 'IPv4 Subnet Mask' is 255.255.255.0, and 'IPv4 Default Gateway' is 192.168.1.1. The 'IPv6 Mode' is 'Route Advertisement'. The 'Mac Address' is 18:68:cb:02:8b:11. The 'MTU' is 1500. The 'DNS Server' section shows a 'Preferred DNS Server' of 8.8.8.8 and an 'Alternate DNS Server' of 8.8.4.4. A 'Save' button is at the bottom.

Field	Value
NIC Type	Auto
IPv4 Address	192.168.1.75
IPv4 Subnet Mask	255.255.255.0
IPv4 Default Gateway	192.168.1.1
IPv6 Mode	Route Advertisement
IPv6 Address	
IPv6 Subnet Mask	
IPv6 Default Gateway	::
Mac Address	18:68:cb:02:8b:11
MTU	1500
Multicast Address	
Preferred DNS Server	8.8.8.8
Alternate DNS Server	8.8.4.4

* Cài đặt thông số ip Wlan cho trùng với hệ thống mạng

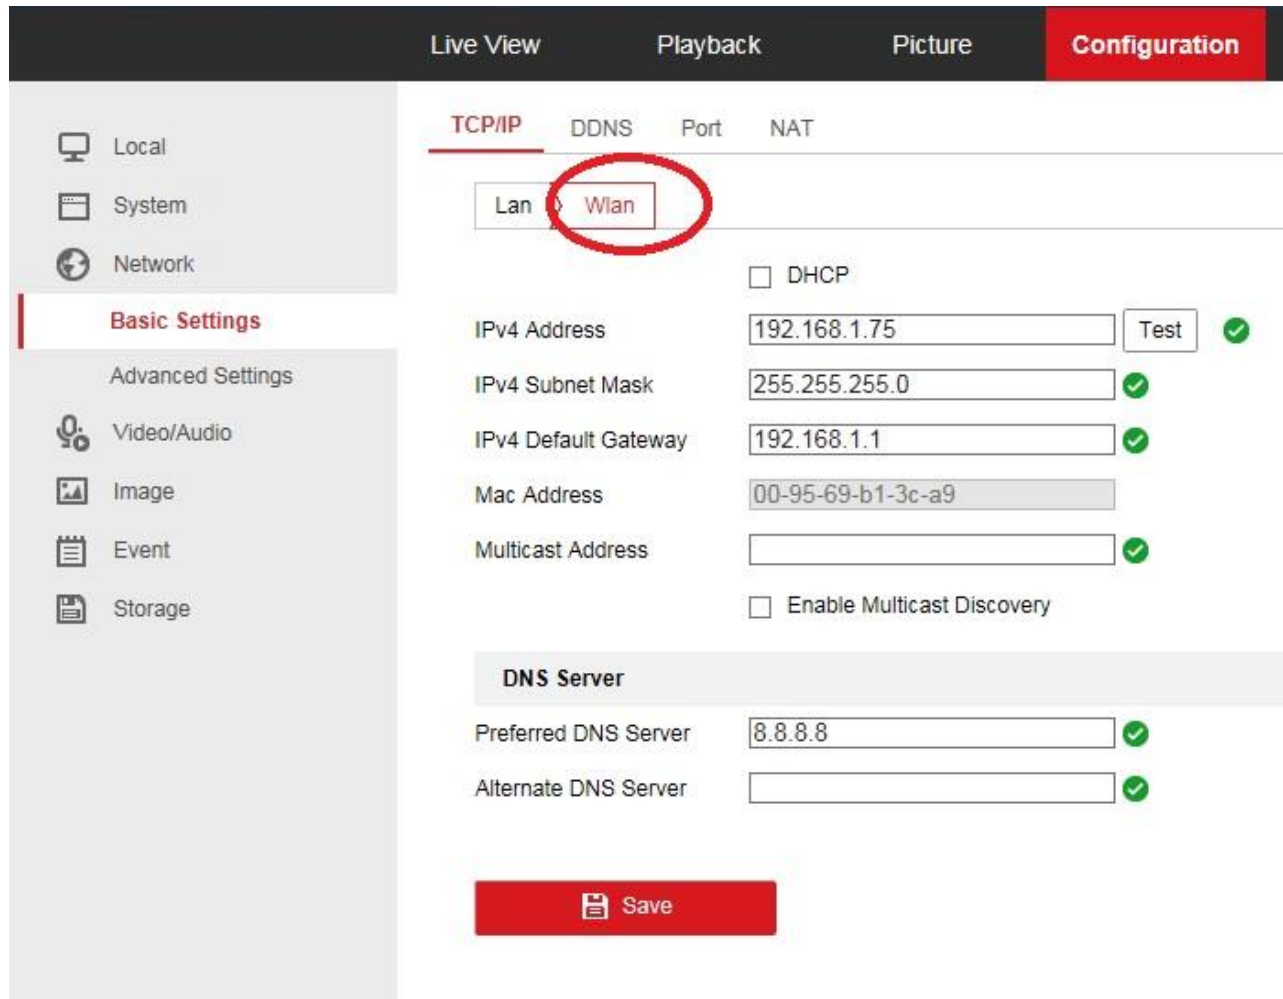

The screenshot shows the 'Configuration' tab of the LEHOANG interface. The 'TCP/IP' sub-tab is active, and the 'Wlan' network interface is selected. The settings are as follows:


Field	Value	Status
IPv4 Address	192.168.1.75	Test ✓
IPv4 Subnet Mask	255.255.255.0	✓
IPv4 Default Gateway	192.168.1.1	✓
Mac Address	00-95-69-b1-3c-a9	
Multicast Address		✓
Enable Multicast Discovery	<input type="checkbox"/>	
DNS Server		
Preferred DNS Server	8.8.8.8	✓
Alternate DNS Server		✓

A red 'Save' button is located at the bottom of the configuration area.

* Cài đặt kết nối wifi

Bước 1 : kích chọn đúng tên wifi, nhập pass wifi ---> **save** lại.

Bước 2 : kích chọn “**search**” vài lần ,trạng thái “**conneced**” là thiết bị camera đã kết nối với wifi thành công.

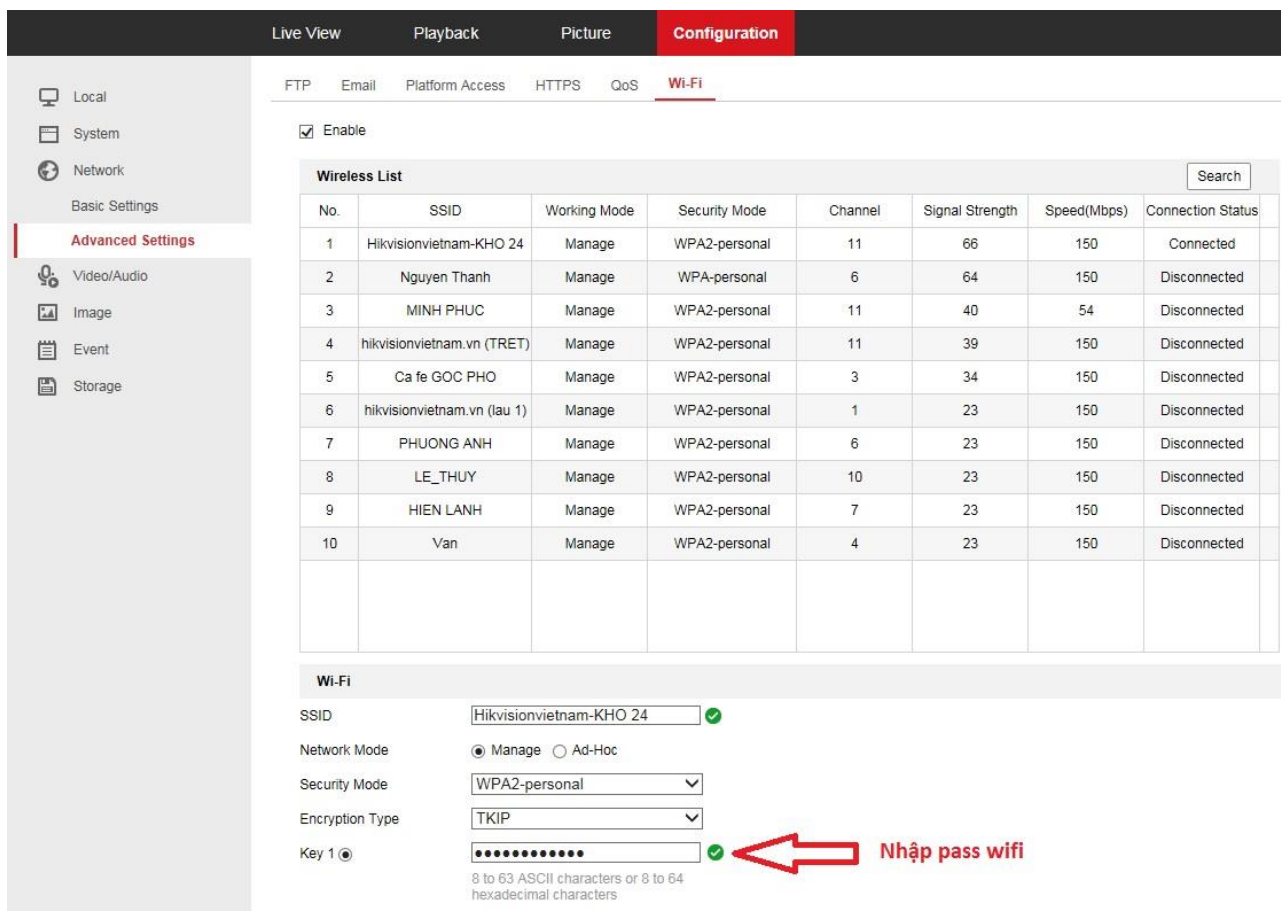

The screenshot displays the camera's configuration interface, specifically the 'Wi-Fi' settings page. The interface includes a navigation menu on the left and a main configuration area. The 'Wi-Fi' section is active, showing a 'Wireless List' table and a 'Wi-Fi' configuration form.

No.	SSID	Working Mode	Security Mode	Channel	Signal Strength	Speed(Mbps)	Connection Status
1	Hikvisionvietnam-KHO 24	Manage	WPA2-personal	11	66	150	Connected
2	Nguyen Thanh	Manage	WPA-personal	6	64	150	Disconnected
3	MINH PHUC	Manage	WPA2-personal	11	40	54	Disconnected
4	hikvisionvietnam.vn (TRET)	Manage	WPA2-personal	11	39	150	Disconnected
5	Ca fe GOC PHO	Manage	WPA2-personal	3	34	150	Disconnected
6	hikvisionvietnam.vn (lau 1)	Manage	WPA2-personal	1	23	150	Disconnected
7	PHUONG ANH	Manage	WPA2-personal	6	23	150	Disconnected
8	LE_THUY	Manage	WPA2-personal	10	23	150	Disconnected
9	HIEN LANH	Manage	WPA2-personal	7	23	150	Disconnected
10	Van	Manage	WPA2-personal	4	23	150	Disconnected

The 'Wi-Fi' configuration section shows the following settings:

- SSID: Hikvisionvietnam-KHO 24
- Network Mode: Manage (selected)
- Security Mode: WPA2-personal
- Encryption Type: TKIP
- Key 1: [Redacted password]


A red arrow points to the password field with the text "Nhập pass wifi".

* Khoảng cách kết nối wifi từ camera đến modum wifi là 50m (khoảng cách trống)

* Các chú ý Cài đặt ghi hình cho camera IP

Đối với camera ip ghi hình lên thẻ nhớ

1. cấu hình thời gian hiển thị trên camera đúng với thời gian thực tế
2. Format thẻ nhớ .(Hỗ trợ thẻ nhớ các hãng : Sandisk, Kingston, Transcend, Samsung, Kingmax.)
3. cấu hình lại lịch ghi hình. (mặc định ban đầu ở chế độ Event(màu tím)phải xóa “Delete all’ và đặt lại lịch ghi hình “continuous”(màu xanh) ---> save lại

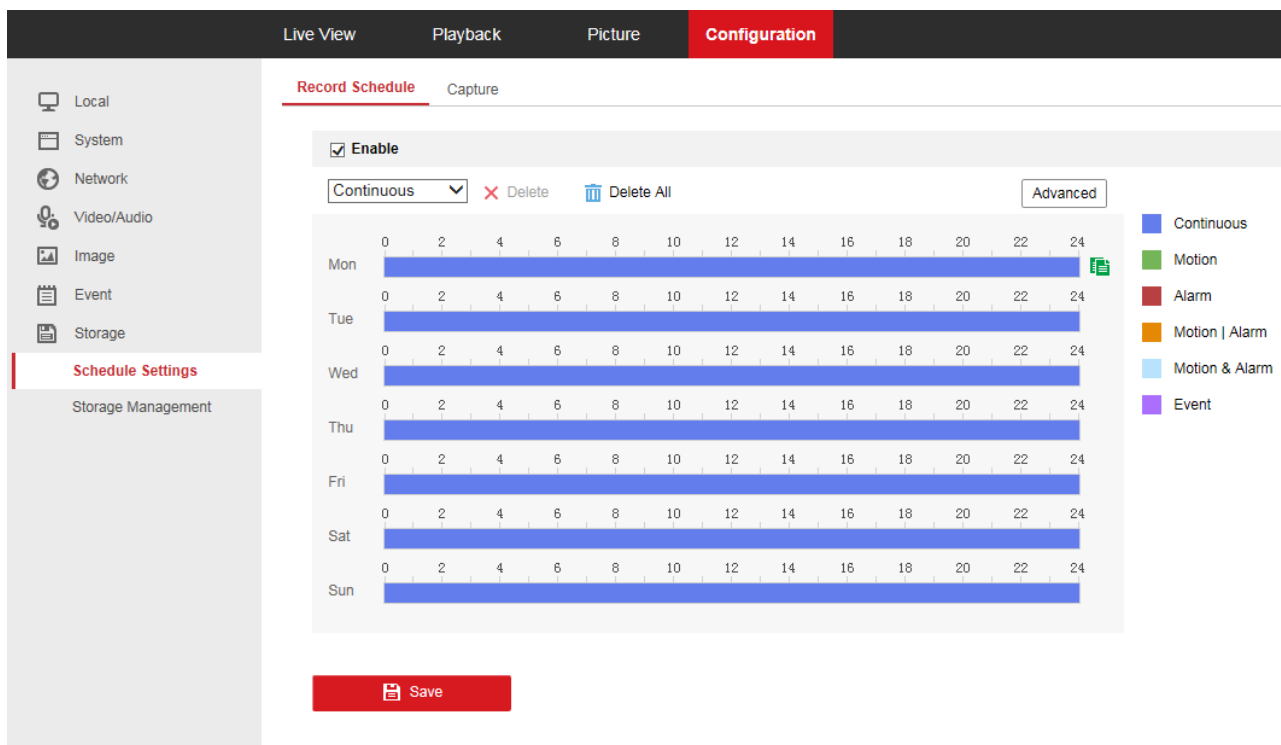

The screenshot displays the 'Configuration' menu with 'Record Schedule' selected. The interface includes a sidebar with navigation options like Local, System, Network, Video/Audio, Image, Event, and Storage. The main area shows the 'Record Schedule' settings, which are currently set to 'Continuous' and 'Enabled'. A legend on the right identifies recording modes: Continuous (blue), Motion (green), Alarm (red), Motion | Alarm (orange), Motion & Alarm (light blue), and Event (purple). A 'Save' button is visible at the bottom.